


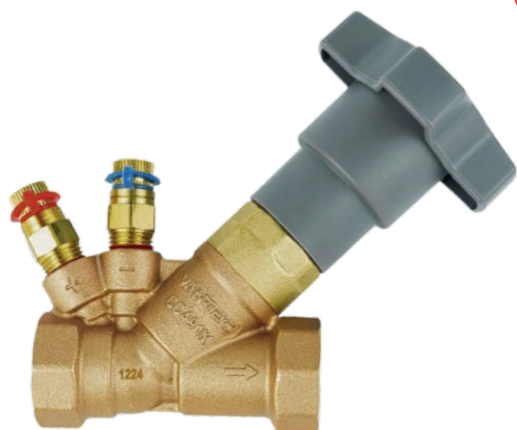


Static Balancing Valve Bronze Fixed Orifice Double Regulating Valve (FODR) PN25 Fig. VA0108

Specification


- ✓ Handwheel operated
- ✓ Numerical indicator
- ✓ Inside screw non-rising handwheel
- ✓ Integral orifice and test points
- ✓ Accuracy of $\pm 5\%$ on.
- ✓ WRAS Approved
- ✓ Flow charts available.
- ✓ Supplied with two test points

NO.	Name	Qty	Material	Remark
1	Set Screw	1	S. S304	
2	Washer	1	PTFE	
3	Packing	1	PTFE	
4	Packing Nut	1	LEAD BRASS	
5	Stem	1	DZR CZ132A	
6	Nut	1	S. S304	
7	Handwheel Assembly	1	PA6+30%GF	Grey
8	Disc assembly	1	DZR CZ132A+EPDM	
9	Bonnet	1	DZR CZ132A	
10	O-Ring	1	EPDM (HA70)	
11	PT Valve (Blue)	1	DZR CZ132A	
12	PT Valve (Red)	1	DZR CZ132A	
13	Flow Controller	1	DZR CZ132A	
14	Body	1	C83600	

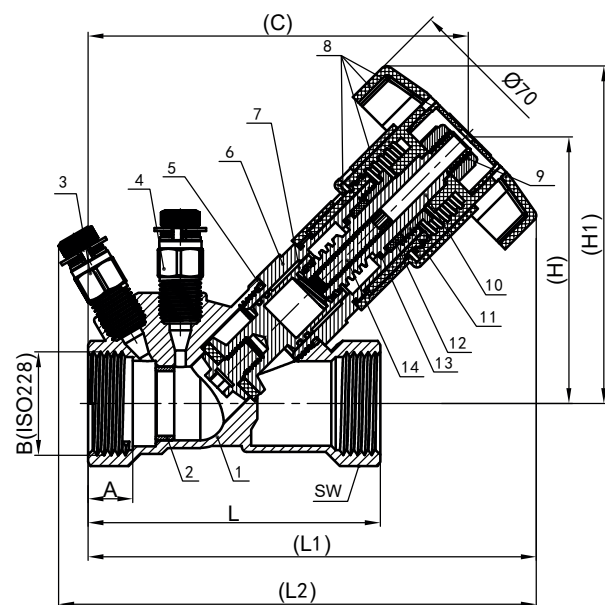

Dimension in mm(For Reference)

Size	L	L1	A	B	C	H	H1	SW	L2
DN15	72.5	128.78	12.5	G1/2	106.55	79.71	101.78	27	143.3
DN20	82	137.78	12.5	G3/4	115.92	84.84	107.28	32	148.1
DN25	95	145.73	14.5	G1	123.59	87.63	109.78	40	156.2
DN32	115	160.85	16.5	G1 1/4	138.7	99.66	121.82	48	148.1
DN40	135	179.18	19	G1 1/2	157.02	108.34	130.49	56	163.5
DN50	150	190.18	19.5	G2	168.02	118.34	140.49	68.5	175.4

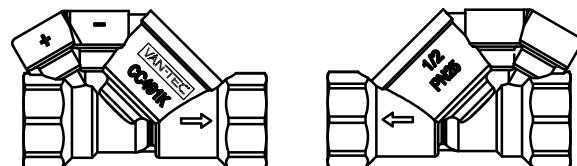

Notes

Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.