



Bronze Y-Type Strainer PN20 Fig. VAS602

Specification

- ✓ Kite marked to BS EN 5154
- ✓ WRAS Approved Product.
- ✓ Threaded bonnet.
- ✓ One piece wedge.
- ✓ Female threaded BS -2779G.
Available with NPT / Rc thread

Water Technical Data


Nominal Pressure	PN2.0 20MPa
Nominal Size	2"-2 1/2" (DN -15DN50)
Operating Temperature	20 bar from -10 to 120°C WRAS Approved to 80°C
Fluid	Water, Non-corrosive liquid

Features & Benefits

- ✓ Kite marked to BS 5154
- ✓ Robust and high quality bronze body & bonnet
- ✓ WRAS approved for use on wholesome (potable) water in sizes 2 – 2 1/2" only
- ✓ WRAS approval temperature 85°C
- ✓ Inside screw pattern with non-rising stem
- ✓ Working medium water, Oil and Stem.

Main Dimensions (mm)

SIZE	DN15	DN20	DN25	DN32	DN40	DN50
Thread BSPT	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	57	72	74.5	95	105	129
H	43	48.5	54	67	75.5	92
D	15	18.5	21	29	32	46
B	11.5	14	16	18	18	21
Mesh (hole Dia.)	30(Ø0.46)			20(Ø0.92)		

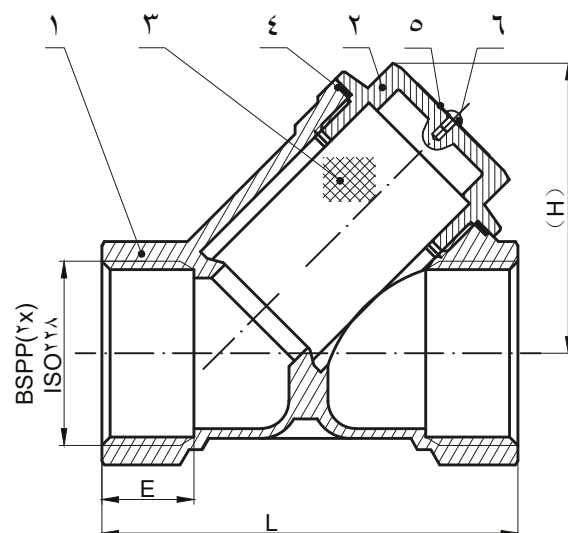

Material Specification

No.	Description	Qty.	Material	Note
1	Valve body	1	C83600/CC491K	
2	Cap	1	C83600/CC491K	
3	Mesh	1	S.S304	
4	Gasket	1	PTFE	
5	Nameplate	1	L2	
6	Rivet	1	SS304 /SS316	

Notes

Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.