



DZR Brass Y-Type Strainer PN20 Fig. VAS609

Specification

- ✓ Y-Type Strainer
- ✓ DZR Brass Body Construction
- ✓ Stainless Steel Filter Screen (SS304)
- ✓ PTFE Gasket
- ✓ Replaceable Stainless Steel Strainer Screen
- ✓ Connections: Female BSPP Threaded ISO 228-1
- ✓ WRAS Approved Product

Material Specification

Part Name	Material	Specification
Gasket	PTFE	
Strainer	Stainless Steel	304
Valve Body	DZR Brass	DZR CZ132

PRESSURE/ TEMPERATURE RATING

- ✓ 20 bar from -20°C to 130°C
- WRAS Approved to 85°C

HYDROSTATIC TEST PRESSURE

- ✓ Shell - 30 bar

Features & Benefits


- ✓ Efficient removal of solid particles and debris
- ✓ DZR brass construction provides excellent dezincification resistance
- ✓ Stainless steel screen offers high corrosion resistance
- ✓ Low pressure loss with optimized Y-pattern design
- ✓ Easy screen cleaning through threaded bonnet
- ✓ Replaceable filter screen for simple maintenance
- ✓ WRAS approved for potable water applications

APPLICATION

Suitable For Potable Water, HVAC, Plumbing and Non-Corrosive Liquids

Main Dimensions (mm)

Size		DN15	DN20	DN25	DN32	DN40	DN50
Thread	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	mm	57	72	74.5	95	105	129
H	mm	34.5	39.5	43	54	61.5	74.5
D	mm	15	18.5	21	29	32	49
E	mm	11.5	14	16	18	18	21
Mesh		30 (hole Ø0.46)		20 (hole Ø0.92)			

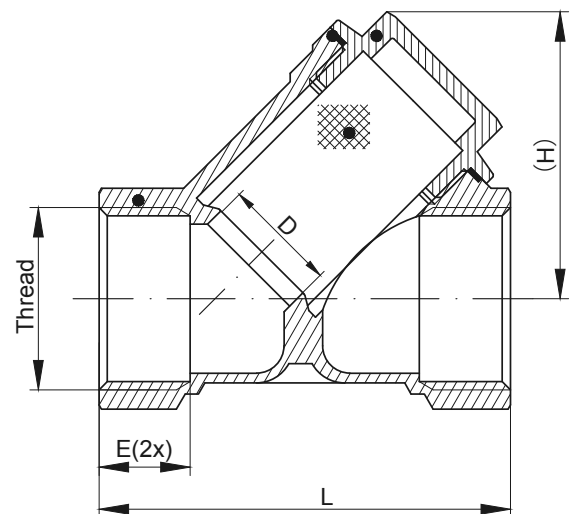

Notes

Specifications, materials and dimensions shown are subject to change without prior notice

