



Bronze Y-Type Strainer PN20 Fig. VAS602

Specification

- ✓ Y-Type Strainer
- ✓ Threaded Cap
- ✓ Stainless Steel Filter Mesh
- ✓ Replaceable Filter Screen
- ✓ Optional NPT Threads
- ✓ Connections: Female BSPP Threaded ISO 228-1
- ✓ WRAS Approved Product

Material Specification

Part Name	Material	Specification
Valve Body	Bronze	C83600/CC491K
Cap	Bronze	C83600/CC491K
Mesh	Stainless Steel	304
Gasket	PTFE	
Rivet	Stainless Steel	304

PRESSURE/ TEMPERATURE RATING

- ✓ 20 bar from -10°C to 170°C
- WRAS Approved to 85°C

HYDROSTATIC TEST PRESSURE

- ✓ Shell - 30 bar

Features & Benefits


- ✓ Protects valves, pumps and equipment from debris
- ✓ Removable cap for easy screen cleaning and maintenance
- ✓ Low pressure loss through streamlined Y-pattern design
- ✓ Corrosion-resistant bronze construction
- ✓ Long service life with minimal maintenance
- ✓ WRAS approved for potable water applications

APPLICATION

Suitable For Potable Water, HVAC, Plumbing and Non-Corrosive Liquids

Main Dimensions (mm)

Size		DN15	DN20	DN25	DN32	DN40	DN50
Thread	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	mm	45	48.5	55	61	63	73
H	mm	71.5	81	94.7	108	122.5	147
D	mm	53	60	72	72	80	100
B	mm	15	20	25	32	38	50
Mesh (hole Dia)		30(Ø0.46)		20(Ø0.92)			

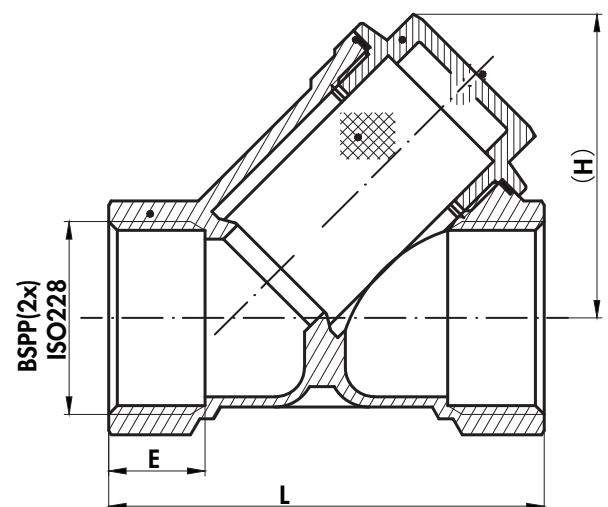

Notes

Specifications, materials and dimensions shown are subject to change without prior notice

