



DZR Air Vent PN16 Fig. VA705

Specification

- ✓ Automatic Float Type
- ✓ Connections: Female BSPP Threaded ISO 228-1
- ✓ Metal-to-Metal Seal
- ✓ Self-Closing Service Valve
- ✓ DZR Brass Body and Bonnet
- ✓ Compact Design

Material Specification

Part Name	Material	Specification
Body	DZR Brass	DZR CZ132A
Float	PP	
O-Ring	EPDM	
Bonnet	DZR Brass	DZR CZ132A
Stem	Brass	C38000
Stealing	EPDM	
Spring	Stainless Steel	304
O-Ring	EPDM	
Core	Brass	C38000
Washer Ring	EPDM	
Cap	Brass	C38000
O-Ring	EPDM	
Adapter	DZR Brass	DZR CZ132A
Spring	Stainless Steel	304
Self-Closing Fitting	DZR Brass	DZR CZ132A
O-Ring	EPDM	

PRESSURE/ TEMPERATURE RATING

- ✓ 16 bar from -10°C to 130°C
- WRAS Approved to 85°C

HYDROSTATIC TEST PRESSURE

- ✓ Shell - 24 bar
- ✓ Seat - 17.6 bar

APPLICATION


Suitable For Potable Water, HVAC, Plumbing and Non-Corrosive Liquids

Features & Benefits

- ✓ Automatically releases trapped air from the system
- ✓ Prevents air locks and improves system efficiency
- ✓ DZR brass body and bonnet for enhanced corrosion resistance
- ✓ Reliable EPDM sealing for long service life
- ✓ Suitable for hot and cold water systems
- ✓ Compact design for easy installation in confined spaces

Main Dimensions (mm)

Size		DN15	DN20	DN25
Thread	in	1/2"	3/4"	1"
L	mm	74.5	94	94
B	mm	15.5	19	24.5
E	mm	12.5	14	16

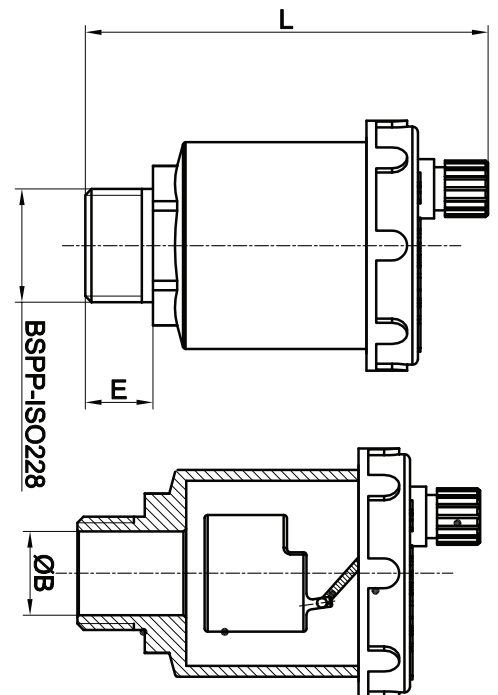

Notes

Specifications, materials and dimensions shown are subject to change without prior notice

