



Brass Y strainer PN20 Fig. VAS608

Specification

- ✓ Y-Type Strainer
- ✓ Female BSP/NPT Threaded
- ✓ Brass Body Construction
- ✓ Stainless Steel 304 Screen
- ✓ PTFE Bonnet Gasket
- ✓ PN20 Pressure Rating
- ✓ WRAS Approved Product

Material Specification

Item	Part Name	Material	Specification
1	Valve Body	Brass	CW617N
2	Bonnet	Brass	CW617N
3	Strainer	Stainless Steel	304
4	Gasket	PTFE	

PRESSURE/ TEMPERATURE RATING

- ✓ 20 bar from 20°C to 150°C
- WRAS Approved to 85°C

HYDROSTATIC TEST PRESSURE

- ✓ Shell - 30 bar
- ✓ Seat - 22 bar

APPLICATION


Suitable For Potable Water, HVAC, Plumbing and Non-Corrosive Liquids

Features & Benefits

- ✓ Effective removal of debris and particles
- ✓ Corrosion resistant brass construction
- ✓ Stainless steel screen for reliable filtration
- ✓ Removable bonnet for easy cleaning
- ✓ Compact design with low maintenance

Main Dimensions (mm)

Size		DN15	DN20	DN25	DN32	DN40	DN50
Thread	in	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	mm	57	72	74.5	95	105	129
H	mm	41.5	48.5	53	67	75.5	89
E	mm	15	18.5	21	29	32	46
D	mm	11.5	14	16	18	18	21
Mesh	30 (Ø0.46)			20 (Ø0.92)			

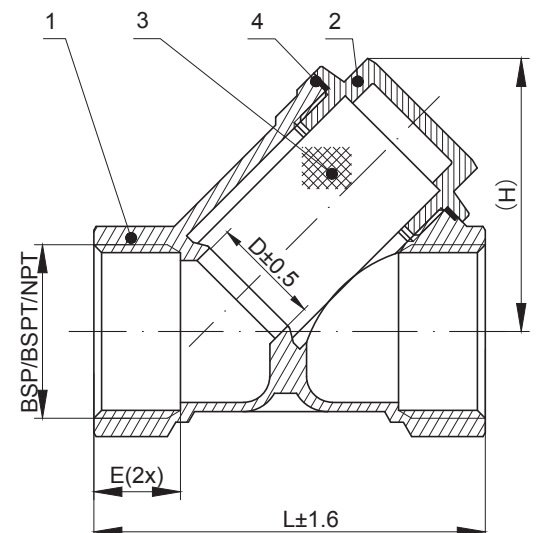

Notes

Specifications, materials and dimensions shown are subject to change without prior notice

